ADVERTISING KIOSK ENCLOSURE

Ideal for Advertising in Retail & Hospitality Environments


- Add your choice of LCD Screen











43" to 65" Models

Incredibly sleek, stylish and slim yet extremely visible. Designed to fit a choice of screen sizes: 43" 49", 50", 55" and 65" Vestel and Hisense Displays also LG and Samsung Displays.



Vestel & Hiesene Displays Content built-in Vestel Media Player. Simply copy and paste your photos & videos onto a USB stick and plug in to the screen. The content will automatically play in a loop.

can be updated easily via USB via the

VESTEL Commercial Grade IPS Panel

Commercial grade 24/7 operation VESTEL IPS Panel, stylish and slim yet extremely visible with a choice of sizes; 32" to 65.

Key Features





24/7 Commercial Use

RGB LED Side Strip Lighting

Available Add-ons

SONY 210W Powered Speakers

HD Camera

Windows or Android Media Player

LED Backlit Printed
Logo on Bottom Glass





Custom RAL Finish & Logo

Incorporate your brand colour scheme & logo into the Kiosk design. With a LED Colour RGB side Strip choice of custom RAL Paint Finish and glass









Easy Portability with a Tilt and Push Design and Grab Handles

The Advertising Kiosk is the perfect solution for large venues or offices where easy portability is key. Simply tilt the kiosk back onto the integrated castor wheels and push to a new destination. This makes it the perfect solution for events, offices and road shows.

Secure Internal Locker for Media Player Connection

Secure Internal Locker with VESA Mounts for Small Form Factor PC and mounting bracket for a Larger PC case. Easily connect to the built in Faceplate which features; 2 x 240V UK Plug Sockets, HDMI & VGA Inputs, RCA Component Sockets, RJ45 Network Socket, 3.5mm Audio and USB Port.

Kiosk Upgrade Extra's











Built in High Quality Sony Speakers & Bluetooth Amplifier

Built in Ultra-slim Profile With Built-in Android Player OS7.1 A total solution 210W Sony Speakers for Impressive Sound and Volume Quality, with a built in NOB Sound Bluetooth Powered Amplifier you can integrate beautiful audio for your touch or signage applications. Fully integrated with the AV Faceplace, simply connect by Bluetooth or AUX.

Upgrade to the Ultra-Slim Profile 700nit Vestel QP Range Panel


New for 2022 is the PR-Range of Vestel Displays, boasting an impressive 700Nit panel brightness and Ultra-Slim profile, making the special edition a premium and slimmer profile unit.


android

Built in System on Chip Android 8.0 Player by Hisense

The Kiosk built using the latest Hisense E Series Range of LCD panel offers Android 8.0 built in media player. Run your own Android application or partner with one of our CMS systems to remote upload and schedule content via the cloud. You can also upgrade to an OPS player or Intel NUC Windows PC if you have.




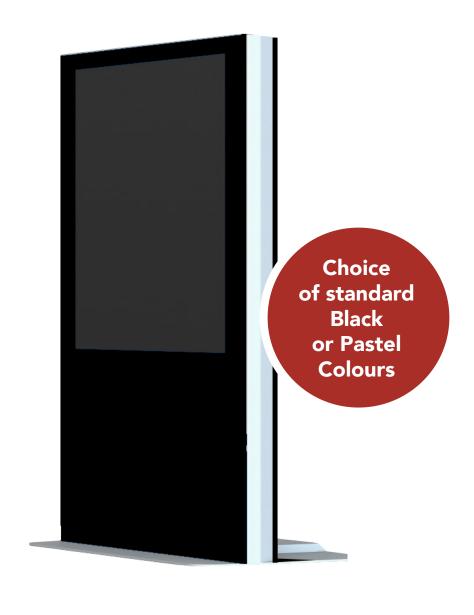

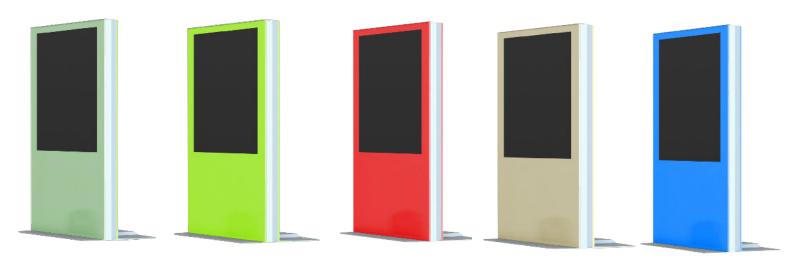

Specification

	Size	50"	55"	65"	
Audio	Speaker Type	Stereo 2 X 10W, 8Ω	Stereo 2 X 10W, 8Ω	Stereo 2 X 10W, 8Ω	
AV Inputs	Video	HDMI,VGA, DVI	HDMI,VGA, DVI	HDMI,VGA, DVI	
	Audio	Audio Socket (3.5mm)	Audio Socket (3.5mm)	Audio Socket (3.5mm)	
Power	Power Consumption (W)	95 W	105 W	74 W	
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz	
Mechanical	Unit Size (HxWxDmm)	1864 x 723 x 450 Base	1870 x 810 x 450 Base	1870 x 960 x 450 Base	
	Package Size (HxWxDmm)	Pallet Size VERTICAL DELIVERY	Pallet Size VERTICAL DELIVERY	Pallet Size VERTICAL DELIVERY	
	Net Weight (kg)	73 kg	79 kg	93 kg	
	Gross Weight (kg)	79 kg	85 kg	98 kg	
Enviromental	Operating Temperature	0-40°C	0 -40 °C	+40°C / 0°C	
	Storage Temperature	0 °C to 50 °C	0 °C to 50 °C	0 °C to 50 °C	
	Operating Humidity	-30°C to 60°C	-30°C to 60°C	-30°C to 60°C	
	Storage Humidity	10% to 80%	10% to 80%	90%	
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI	

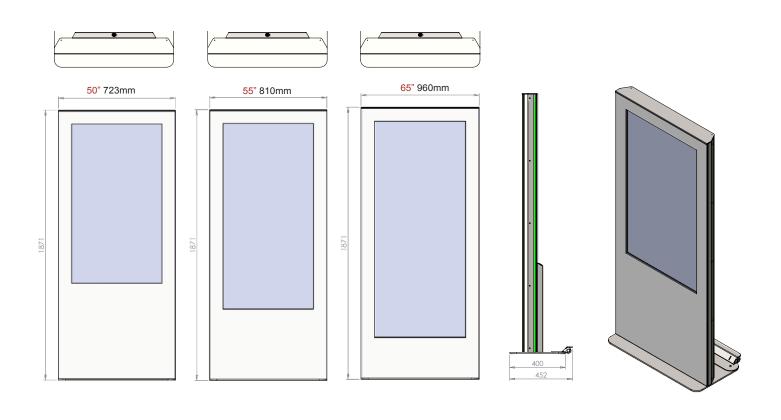

Vestel Specification

Size											
	PR43	PR50		PR55		PR65	PN43	PN50			
Sreen Size	43"	50"		55"		65"	43"	50"			
Backlight	S-DLED										
Brightness	700cd/m2 (typ.)										
Resolution	3840 x 2160 (UHD)										
Contrast Ratio	1200:1 (typ.)	5000:1 (typ.)		1200:1 (typ.)			5000:1 (typ.)				
Dynamic Contrast	70000:1 50000:1										
Lifetime	50000 Hours (min.)										
Response	8 ms (typ.)	9.5 ms (typ.)	8 ms (typ.)			yp.)	9.5 ms (typ.)				
Active Area	941 x 530mm	1095 x 616mm	1210	x 680mm 1428 x 804mm		04mm 9	41 x 530mm	1095 x 616mr			
View Angle	178 Vertical, 178 Horizontal										
Colour Value	1.07B (8-Bit+FRC)	1.07B	1.07B (8-Bit+FRC)				1,07B				
Screen Treatment	ЗН										
Haze Level	1%	3%	1%				3%				
Screen Treatment	3Н										
Haze Level	1%	3%	1%					3%			
Refresh Rate	60 Hz										
Orientation	Horizontal/Vertical										
Operation	24/7										
Usage	Indoor										
Connectivity											
	PR43	PR50	F	PR55	PR65		PN43	PN50			
Video Input	4 x HDMI, 1 x USB						2 x HDMI, 3 x USB				
Video Output	1 x HDMI						2 x HDMI, 3 x USB				
Audio Input		Line In L/R									
Audio Output	Headphone, Optic SPDIF										
External Control	RS232, Ethernet (RJ45)										
External Sensor	RJ12										
Network	WiFi, Ethernet (RJ45)										